

EL[®]MARK

The Brand of Electricity

STELLAR LEDSMD

GU10



Technical data:

- Rated voltage: 230V; 50-60Hz
- Power: 3.5W; 7W;
- Colour temperature: 2700K; 4000K; 6400K
- LED source: SMD 2835
- Lamp holder: GU10
- Beam angle: 120°
- Colour rendering index: Ra≥80
- Switch on/off: >20 000
- Average life: 30 000h
- Power factor: $\lambda > 0.8$
- Starting time: < 0.5s
- Protection degree: IP20

Features:

- Reduced operational cost thanks to lower energy consumption.
- Mercury free.
- Maximum resistance to switching loads.
- Correct operation even at low temperature.
- Instant-on light.

Area of application:

- General illumination
- Domestic applications
- Outdoor applications only in suitable luminaires


TECHNICAL SPECIFICATION

LAMPS AND COMPONENTS

ELMARK[®]

The Brand of Electricity

Variants and Dimensions:

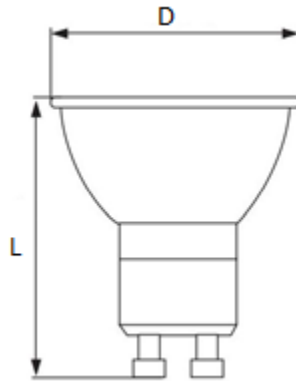

Watt	Lamp holder	LED lamp lumens	Colour temp.	Beam angle	Size (mm)		Catalogue number
					(W)	(lm)	
3.5	GU10	250	4000	120°	53	50	99XLED727
3.5	GU10	250	2700	120°	53	50	99XLED728
3.5	GU10	250	6400	120°	53	50	99XLED731
7	GU10	500	4000	120°	53	50	99XLED729
7	GU10	500	2700	120°	53	50	99XLED730
7	GU10	500	6400	120°	53	50	99XLED796

Barcodes:


99XLED727	3800131207951
99XLED728	3800131207944
99XLED731	3800131215369
99XLED729	3800131210715
99XLED730	3800131210722
99XLED796	3800131210739

TECHNICAL SPECIFICATION

LAMPS AND COMPONENTS

ELMARK[®]

The Brand of Electricity

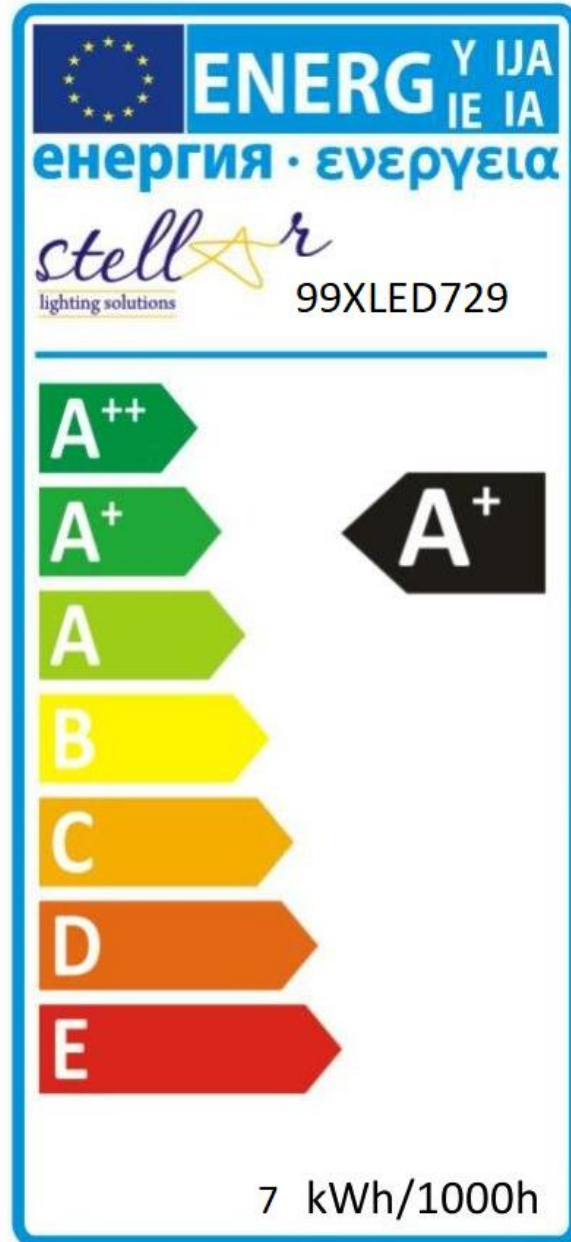

EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 62560 • EN 13032-4 • EN 50581:2012

CE RoHS COMPLIANT 

www.elmarkholding.eu